

# Air Fly for ATEM

Core Product

## SKAARHOJ Air Fly - Live Switching Controller for ATEM

The Air Fly for ATEM offers a cost-effective solution for video production, tailored for Black Magic ATEM switchers. It features fixed labels on keys for ease of use, along with 6 four-way buttons equipped with OLED displays to show dynamic labels or values. A smooth fader enables precise transition control, complemented by user-configurable buttons for tailored operations. Its design focuses on efficiency and adaptability, making it ideal for live events, broadcasts, and studio work. With its intuitive layout and customizable controls, the Air Fly for ATEM streamlines production workflows, allowing for seamless switching and enhanced creative control.



### Benefits


- Tailored design for Black Magic ATEM switchers ensures seamless integration and operation
- OLED displays on four-way buttons offer real-time feedback and customizable labels, enhancing user control
- Dedicated transition fader allows for smooth, precise control over video transitions
- User-configurable buttons enable personalized setups, adapting to various production needs
- Cost-effective solution that enhances workflow efficiency without compromising on quality

### Features


- Dedicated for ATEM
- Support for other devices
- Advanced ergonomics
- Versatile connectivity via IP
- Durable build quality
- 12 program and 12 preview buttons
- 12 menu selection buttons
- 6 programmable 4-way buttons with OLED screens
- Low profile durable transition fader
- Keyer section with all essentials
- Shift and user keys in large ME section
- User customization with Reactor Web UI
- 1G Ethernet w/Power over Ethernet (PoE IEEE802.3af/t)
- Designed and made in Denmark
- Time tested - adopted by professionals worldwide

Hardware Specifications	
Buttons	Elastomer Button (x53); Elastomer Four-Way Button (x2); Elastomer Four-Way Button w/Display (x6)
Analog Components	Slider 45mm (x1)
Programmable OLED Tiles	64x32 pixels (x6)
Other	LED-Bar, 3 steps (x6); LED (x1)
Connectivity	
Networking	1G Ethernet w/Power over Ethernet (PoE IEEE802.3af/t)
Power Supply	12V DC Jack 5.5mm x 2.1mm x 10mm Center Positive PoE IEEE802.3af/t
Service Port	Micro USB for setting manual IP
Peripherals	USB-A 2.0 (500 mA) for Stream Deck, X-keys, additional networking adapters, frame grabbers etc.
Software	
Platform	Blue Pill (Reactor, Device Cores, skaarOS Linux)
Licenses	Full Reactor and Device Core licenses included
Physical and Shipping	
Product Weight	1376 g
Shipping Box Weight	2304 g
In The Box	(This Product) 12V Power Supply: Manufacturer: PHIHONG, Model Name: PSA15R-120P, Output: 12V/1.25A, Cable Length: 1.5m, Adapter type: EU, GB, US, AU depending on shipping country, DC Output Connector: 5.5mm x 2.1mm x 10mm Center Positive Getting Started Guide
Recommended Accessories (not included)	Ethernet Cable: Cat 6 S/FTP or better
Country of Origin	Denmark
EAN Code	5714074002802

## Technical Drawings

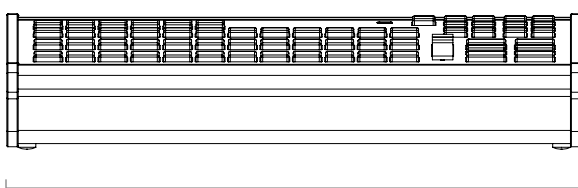

310 mm  
12.2"

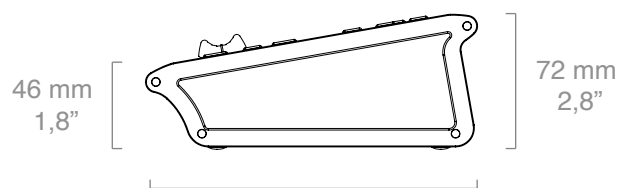

46 mm  
1,8"

178 mm  
7"

72 mm  
2,8"