

# Air Fly for vMix

Built To Order

*SKAARHOJ Air Fly - Live Switching Controller for vMix*

The Air Fly for vMix offers a cost-efficient solution for enhancing video production workflows. Designed specifically for vMix switchers, it includes fixed labels on keys for immediate recognition, six four-way buttons with OLED displays for dynamic label or value visualization, and a smooth fader for precise transition control. Additionally, user-customizable buttons provide flexibility for various production needs. This switching surface is tailored to streamline operations and improve efficiency in live production environments.



## Benefits


- Designed specifically for vMix, ensuring seamless integration and operation
- OLED displays on buttons for clear, customizable labeling, enhancing user experience
- Smooth transition fader allows for precise control over live video feeds
- User-customizable buttons offer flexibility to adapt to various production scenarios
- Cost-efficient solution to upgrade and professionalize vMix video productions

## Features


- Dedicated for TriCaster
- Support for other devices
- Advanced ergonomics
- Versatile connectivity via IP
- Durable build quality
- 12 program and 12 preview buttons
- 12 menu selection buttons
- 6 programmable 4-way buttons with OLED screens
- Low profile durable transition fader
- Keyer section with all essentials
- Shift and user keys in large ME section
- User customization with Reactor Web UI
- 1G Ethernet w/Power over Ethernet (PoE IEEE802.3af/t)
- Designed and made in Denmark
- Time tested - adopted by professionals worldwide

Hardware Specifications	
Buttons	Elastomer Button (x53); Elastomer Four-Way Button (x2); Elastomer Four-Way Button w/Display (x6)
Analog Components	Slider 45mm (x1)
Programmable OLED Tiles	64x32 pixels (x6)
Other	LED-Bar, 3 steps (x6); LED (x1)
Connectivity	
Networking	1G Ethernet w/Power over Ethernet (PoE IEEE802.3af/t)
Power Supply	12V DC Jack 5.5mm x 2.1mm x 10mm Center Positive PoE IEEE802.3af/t
Service Port	Micro USB for setting manual IP
Peripherals	USB-A 2.0 (500 mA) for Stream Deck, X-keys, additional networking adapters, frame grabbers etc.
Software	
Platform	Blue Pill (Reactor, Device Cores, skaarOS Linux)
Licenses	Full Reactor and Device Core licenses included
Physical and Shipping	
Product Weight	1376 g
Shipping Box Weight	2304 g
In The Box	(This Product) 12V Power Supply: Manufacturer: PHIHONG, Model Name: PSA15R-120P, Output: 12V/1.25A, Cable Length: 1.5m, Adapter type: EU, GB, US, AU depending on shipping country, DC Output Connector: 5.5mm x 2.1mm x 10mm Center Positive Getting Started Guide
Recommended Accessories (not included)	Ethernet Cable: Cat 6 S/FTP or better
Country of Origin	Denmark
EAN Code	5714074002567

## Technical Drawings

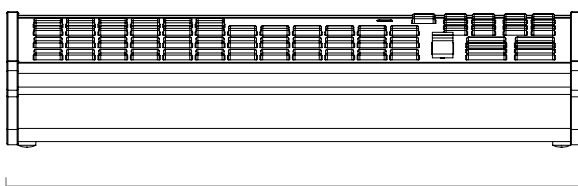

310 mm  
12.2"

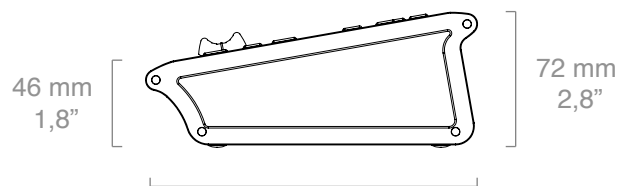

46 mm  
1,8"

178 mm  
7"

72 mm  
2,8"