


T-Block Right - Slim Black

Built To Order

SKAARHOJ T-Block Right - Slim Black - Modular transition controller for Live Switching

SKAARHOJ T-Block is a modular live switching controller that brings the precision of a high-quality T-bar in a compact and customizable form. It fits perfectly into SKAARHOJ’s MegaPanel system or works as a transition block for your custom surface.

The T-Block offers a highly responsive T-bar with an LED ring, giving operators precise control over transitions and live video feeds. Paired with programmable buttons and encoders, it allows you to design your ideal control layout, whether you’re working with cloud-based platforms like Grass Valley AMPP or hardware systems such as Panasonic Kairos, Vizrt TriCaster, BlackMagic ATEM and vMix. It’s the perfect companion for users who need tactile control over their live switching operations in a compact and easily expandable format.

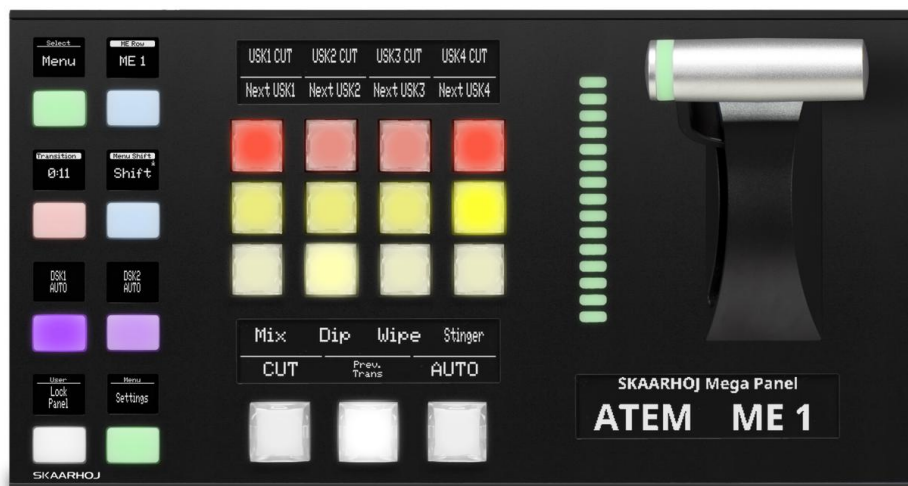

Benefits

- Compact, slim black design for efficient space use and aesthetic appeal.
- Ergonomic T-bar and responsive buttons for optimal control in live productions.
- Professional-grade NKK buttons offer durability and tactile feedback.
- Designed to integrate seamlessly in multi-M/E setups for comprehensive control.
- Ideal for high-caliber live switching environments requiring precision and style.

Features

- Extensive list of supported devices
- Advanced ergonomics
- Versatile connectivity via IP
- Durable build quality
- Slim enclosure for modular alignment
- SKAARHOJ flagship T-bar with LED ring
- 15 NKK buttons
- 8 silicone buttons
- Multiple OLED displays for labels and feedback
- Universal control of multiple 3rd party devices
- User customization with Reactor Web UI
- 1G Ethernet w/Power over Ethernet (PoE IEEE802.3af/t)
- Designed and made in Denmark
- Time tested - adopted by professionals worldwide

Hardware Specifications	
Component Highlights	Exclusive SKAARHOJ Hall Effect T-Bar with LED ring Sculptured cap NKK broadcast buttons
Buttons	Elastomer Four-Way Button (x8); Sculptured Hard Cap Button (x15)
Analog Components	T-bar Large w/RGB (x1)
Programmable OLED Tiles	64x26 pixels, gray (x8); 84x32 pixels, gray (x2); 88x32 pixels, gray (x1); 128x32 pixels, gray (x2); 64x48 pixels (x8); 256x26 pixels, gray (x3); 64x58 pixels, gray (x4); 64x32 pixels, gray (x8)
Other	OLED Display Tile (x28); LED-Bar, 15 steps (x1)
Connectivity	
Networking	1G Ethernet w/Power over Ethernet (PoE IEEE802.3af/t)
Power Supply	12V DC Jack 5.5mm x 2.1mm x 10mm Center Positive PoE IEEE802.3af/t
Service Port	Micro USB for setting manual IP
Peripherals	USB-A 2.0 (500 mA) for Stream Deck, X-keys, additional networking adapters, frame grabbers etc.
Software	
Platform	Blue Pill (Reactor, Device Cores, skaarOS Linux)
Licenses	Full Reactor and Device Core licenses included
Physical and Shipping	
Product Weight	1510 g
Shipping Box Weight	2510 g
In The Box	(This Product) 12V Power Supply: Manufacturer: PHIHONG, Model Name: PSA15R-120P, Output: 12V/1.25A, Cable Length: 1.5m, Adapter type: EU, GB, US, AU depending on shipping country, DC Output Connector: 5.5mm x 2.1mm x 10mm Center Positive Getting Started Guide
Recommended Accessories (not included)	Ethernet Cable: Cat 6 S/FTP or better
Country of Origin	Denmark
EAN Code	5714074003267

Technical Drawings

