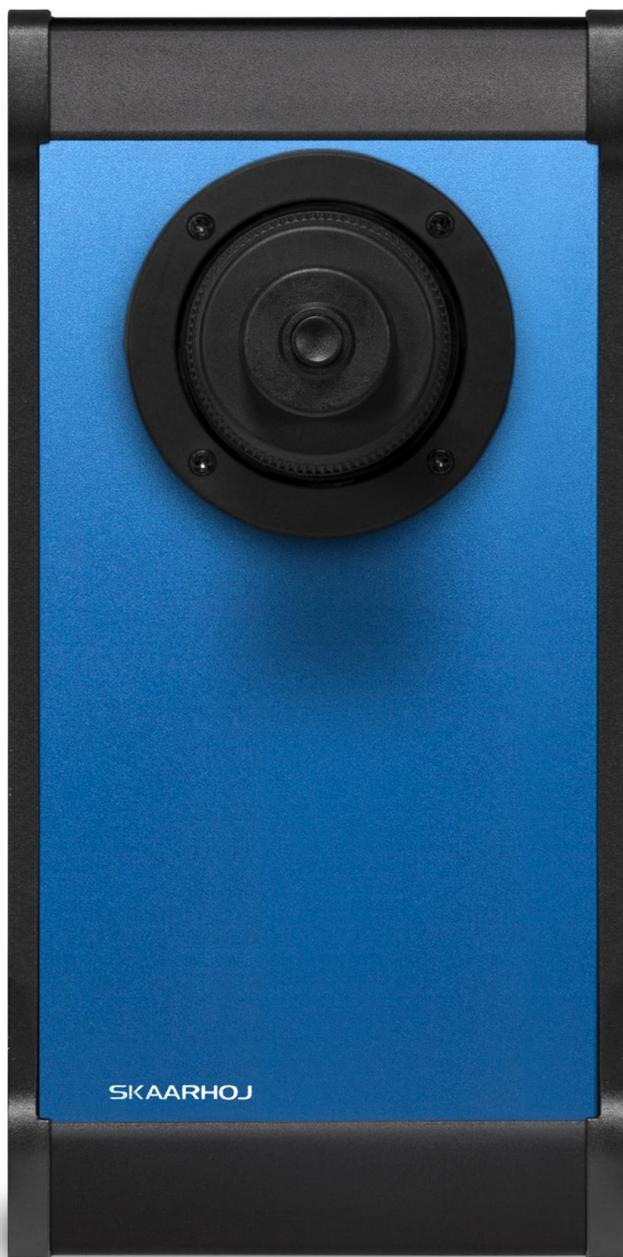# XC7

Built To Order

SKAARHOJ XC7 - Universal IP-based Joystick Panel

The XC7 is a sleek addition to SKAARHOJ's controller lineup, designed to easily add joystick control to existing setups. Featuring a 3-axis joystick with a reset button, it offers precise control over pan, tilt, and zoom functions. Its minimalist design focuses on functionality and ease of use, making it the perfect companion for other SKAARHOJ controllers.

Benefits

- Add-on Flexibility: Easily integrates with existing SKAARHOJ panels, enhancing control without clutter.
- Simple Yet Effective: Focuses on essential joystick controls for pan, tilt, and zoom, streamlining operations.
- Plug-and-Play: Designed for quick integration and immediate use, reducing setup time.
- Discreet Footprint: Compact design allows it to fit into any setup without taking up valuable space.

Features

- 3-axis joystick w/Homing button
- Designed to complement other SKAARHOJ controllers
- 100 Mbit Ethernet w/Power over Ethernet (PoE IEEE802.3af)
- UniSketch Platform w/Raw Panel Server mode
- Designed and made in Denmark

Hardware Specifications

Buttons	4-Axis Joystick, Top button (x1)
Analog Components	4-Axis Joystick, Rotate (x1); 4-Axis Joystick, Left-Right (x1); 4-Axis Joystick, Up-Down (x1)

Connectivity

Networking	100 Mbit Ethernet w/Power over Ethernet (PoE IEEE802.3af)
Power Supply	12V DC Jack 5.5mm x 2.1mm x 10mm Center Positive PoE IEEE802.3af/t
Service Port	Micro USB for updating firmwares and setting manual IP

Software

Platform	UniSketch (Raw Panel Server, Legacy Device Cores)
Licenses	N/A

Physical and Shipping

Product Weight	572 g
Shipping Box Weight	1623 g
In The Box	(This Product) 12V Power Supply: Manufacturer: PHIHONG, Model Name: PSA15R-120P, Output: 12V/1.25A, Cable Length: 1.5m, Adapter type: EU, GB, US, AU depending on shipping country, DC Output Connector: 5.5mm x 2.1mm x 10mm Center Positive Micro USB Cable Getting Started Guide
Recommended Accessories (not included)	Ethernet Cable: Cat 6 S/FTP or better
Country of Origin	Denmark
EAN Code	5714074003786

Technical Drawings

134 mm
5,2"

88 mm
3,4"

46 mm
1,8"

72 mm
2,8"

178 mm
7"